



### Description

Organic Thermal-Link (OTCO) is defined as a non-resettable protective device, functioning one time only. It mainly consists of metal case, spring, sliding contact and thermal pellet. When the Thermal-Link senses abnormal heat and temp. reaches the predetermined fusing temp., thermal pellet melts and the sliding contact separates from the isolated lead with the assistance of the trip spring, thereby the circuit is disconnected

SETsafe | SETfuse Organic Thermal-Link (OTCO) RT series Rated Functioning Temp. from 72 °C to 263 °C, Rated Current: 15 A/ 16 A, safety certification Includes UL, cUL, PSE, VDE, KC, CCC, and complies with RoHS and REACH.

### Features

- High Accuracy of Functioning Temp.
- Non-Resettable
- Organic Thermal Pellet
- Metal Case
- Low Resistance
- RoHS & REACH Compliant


### Applications

- Small Home Appliances
- Comfort Home Appliances
- Personal Care Appliances
- Commercial Appliances
- Automobile Field


### Customization

- Other Temp.
- The Length of Lead Wires
- Taping Packing Available
- Leads Forming Types

### Structure Diagrams

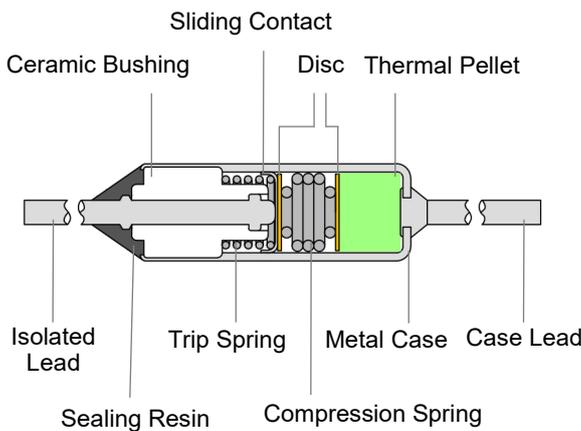


### Marking

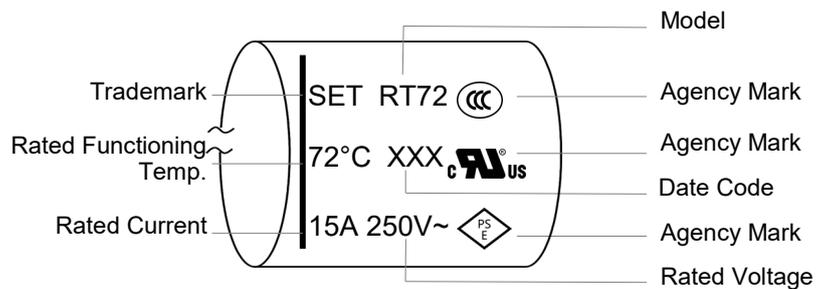

Remark: The Date Code means Year and quarter: A stands for 2000, B stands for 2001 and 01 stands for the first quarter, 02 stands for the second quarter, and so on.

### Dimensions (mm)

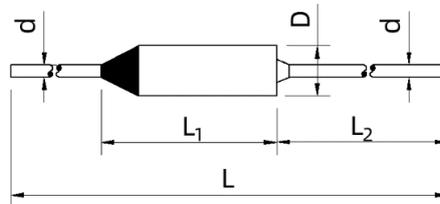

Lead Length	L	L <sub>1</sub>	L <sub>2</sub>	D	d
Standard	65 ± 3	( 14 )	35 ± 2	Φ 4 ± 0.2	Φ 1 ± 0.1
Long	81 ± 3	( 14 )	35 ± 2	Φ 4 ± 0.2	Φ 1 ± 0.1
Option	Customization	( 14 )	Customization	Φ 4 ± 0.2	Φ 1 ± 0.1

Specifications


Rated Functioning Temp. ( $T_f$ ) °C

	Model	Fusing Temp.	$T_h$	$T_h$ (UL/cUL)	$T_m$	$I_r$	$U_r$	$I_n$	$I_{max}$	UL <sup>®</sup>	cUL <sup>®</sup>	VDE <sup>®</sup>	PSE <sup>®</sup>	KC <sup>®</sup>	CCC <sup>®</sup>	RoHS REACH
		(°C)	(°C)	(°C)	(A)	(V)	(VAC)	(kA)	(kA)	UL	cUL	VDE	PSE	KC	CCC	
263	RT263	261 +2 / -4	N/A	220	480	15 / 16	250	1.5	3	●	●	○	○	○	○	RoHS ● REACH*
257	RT257	254 ± 2	200	220	480	15 / 16	250	1.5	3	●	●	●	●	●	●	●
240	RT240	236 ± 2	200	205	450	15 / 16	250	1.5	3	●	●	●	●	●	●	●
229	RT229	227 ± 2	200	200	450	15 / 16	250	1.5	3	●	●	●	●	●	●	●
216	RT216	213 ± 2	186	200	450	15 / 16	250	1.5	3	●	●	●	●	●	●	●
192	RT192	190 ± 2	162	177	300	15 / 16	250	1.5	3	●	●	●	●	●	●	●
184	RT184	181 ± 2	154	169	250	15 / 16	250	1.5	3	●	●	●	●	●	●	●
172	RT172	170 ± 2	143	157	260	15 / 16	250	1.5	3	●	●	●	●	●	●	●
167	RT167	164 ± 2	137	152	220	15 / 16	250	1.5	3	●	●	●	●	●	●	●
152	RT152	149 ± 2	122	137	205	15 / 16	250	1.5	3	●	●	●	●	●	●	●
144	RT144	141 ± 2	114	129	300	15 / 16	250	1.5	3	●	●	●	●	●	●	●
134	RT134	131 ± 2	104	119	250	15 / 16	250	1.5	3	●	●	●	●	●	●	●
128	RT128	124 ± 2	98	113	200	15 / 16	250	1.5	3	●	●	●	●	●	●	●
121	RT121	118 ± 2	93	106	300	15 / 16	250	1.5	3	●	●	●	●	●	●	●
117	RT117	114 ± 2	88	102	200	15 / 16	250	1.5	3	●	●	●	●	●	●	●
110	RT110	108 ± 2	82	95	240	15 / 16	250	1.5	3	●	●	●	●	●	●	●
104	RT104	102 ± 2	74	89	250	15 / 16	250	1.5	3	●	●	●	●	●	●	●
99	RT99	95 ± 2	69	84	200	15 / 16	250	1.5	3	●	●	●	●	●	●	●
94	RT94	91 ± 2	64	79	300	15 / 16	250	1.5	3	●	●	●	●	●	●	●
84	RT84	82 ± 2	54	69	200	15 / 16	250	1.5	3	●	●	●	●	●	●	●
77	RT77	74 ± 2	50	62	300	15 / 16	250	1.5	3	●	●	●	●	○	●	●
72	RT72	69 ± 2	42	57	180	15 / 16	250	1.5	3	●	●	●	●	○	●	●


Note:

1. "●"Means certificated, "○"Means non-certificated, RoHS & REACH Compliant. "\*" indicates that RT263 complies with REACH Directive 1907/2006/EC, SVHC Candidate List, Batch 29, Item 235 for most of the content (please consult SET for details).
2. For  $T_h$  test, UL / cUL standard recommends the thermocouples to monitor the temp. of OTCO body, while other standards recommend the thermocouples to monitor the environment temp. in the oven.
3. RT series with a  $T_f$  rating 175°C and above comply with UL conductive heat aging (CHAT) requirements.

Temp. Rise (Reference)


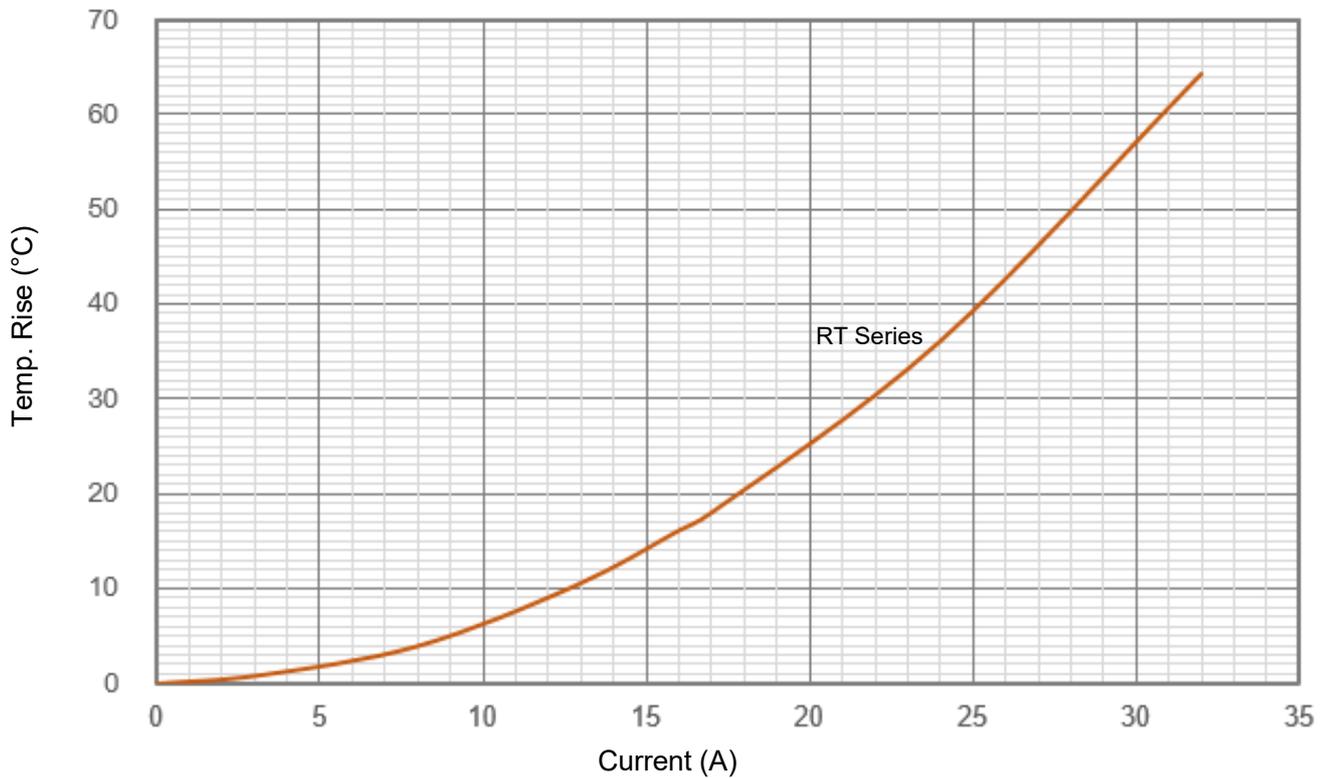


Response Time (Reference)

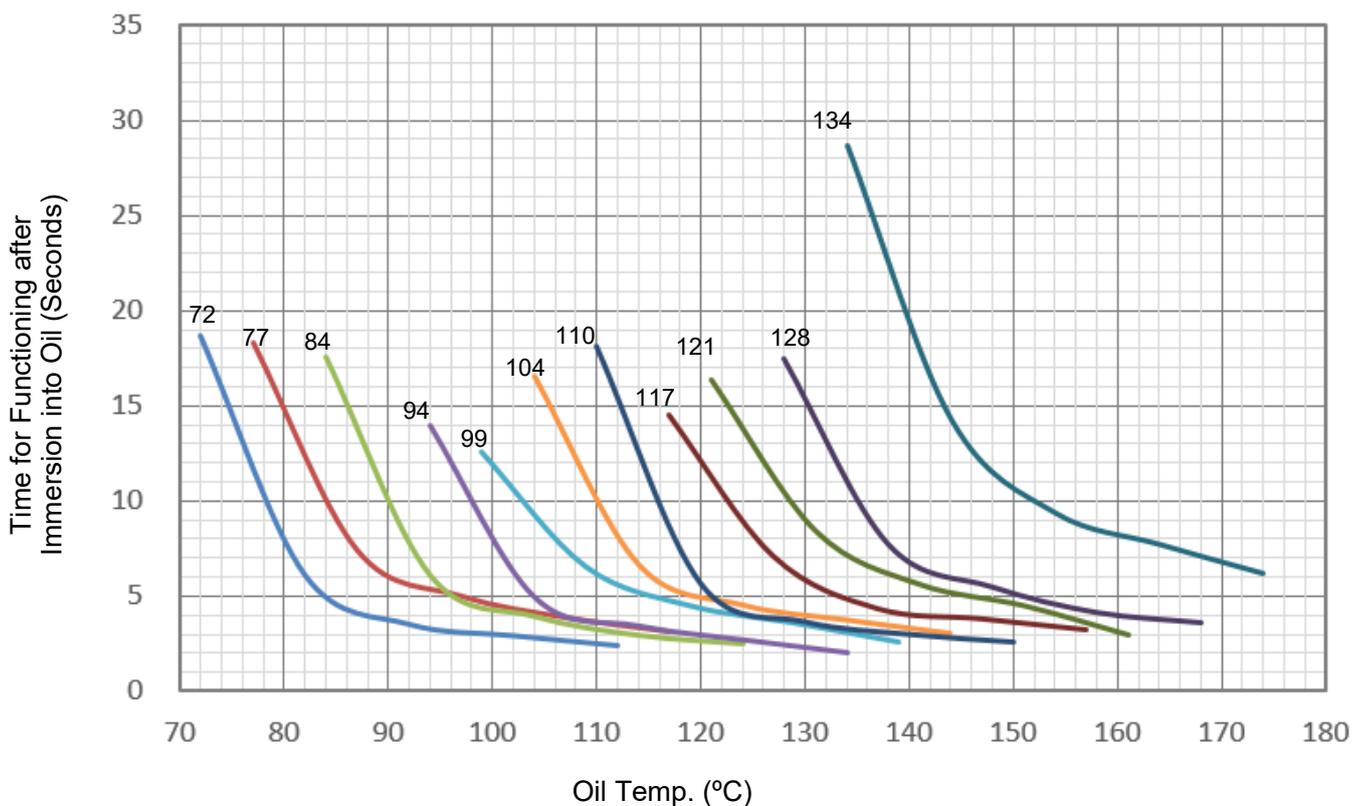

Thermal-Link (OTCO)-Organic Type

RT Series I: 15A/16A

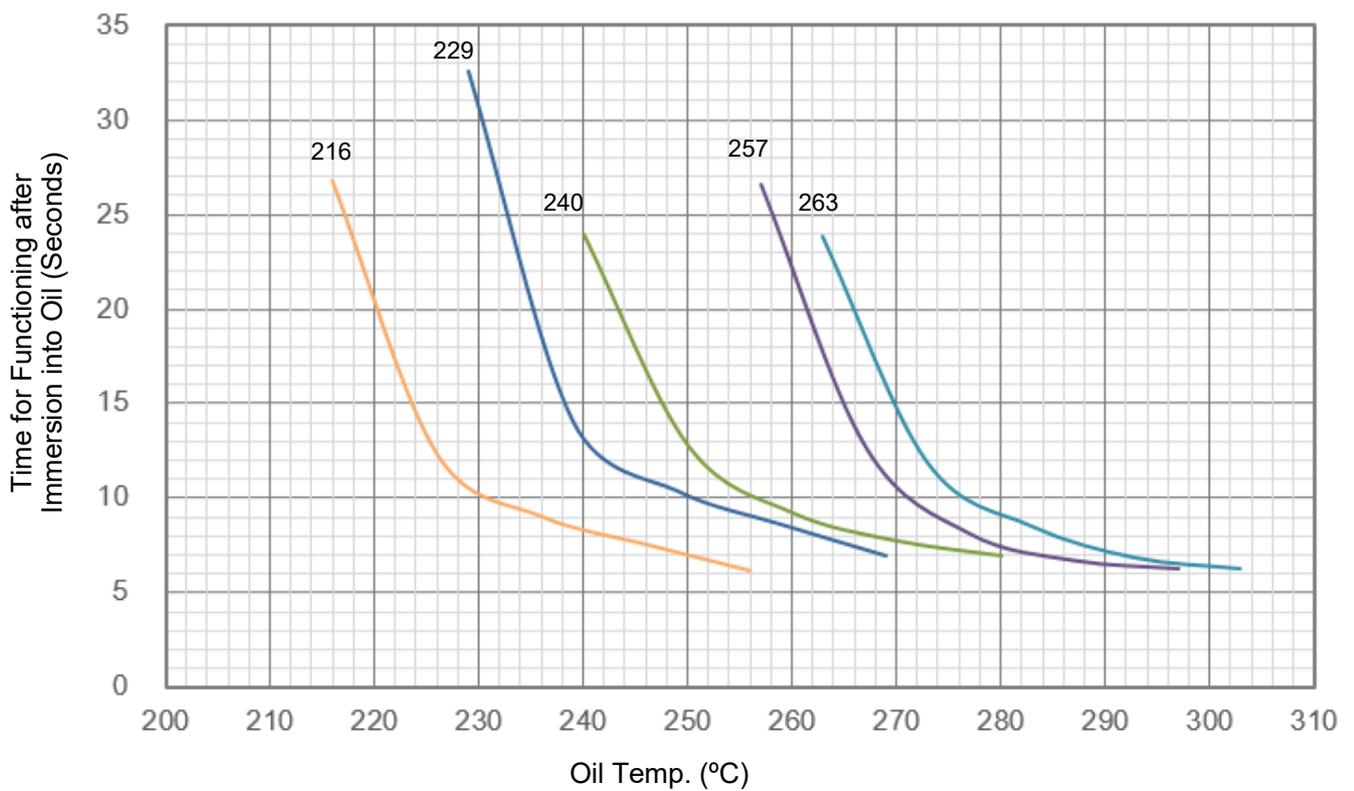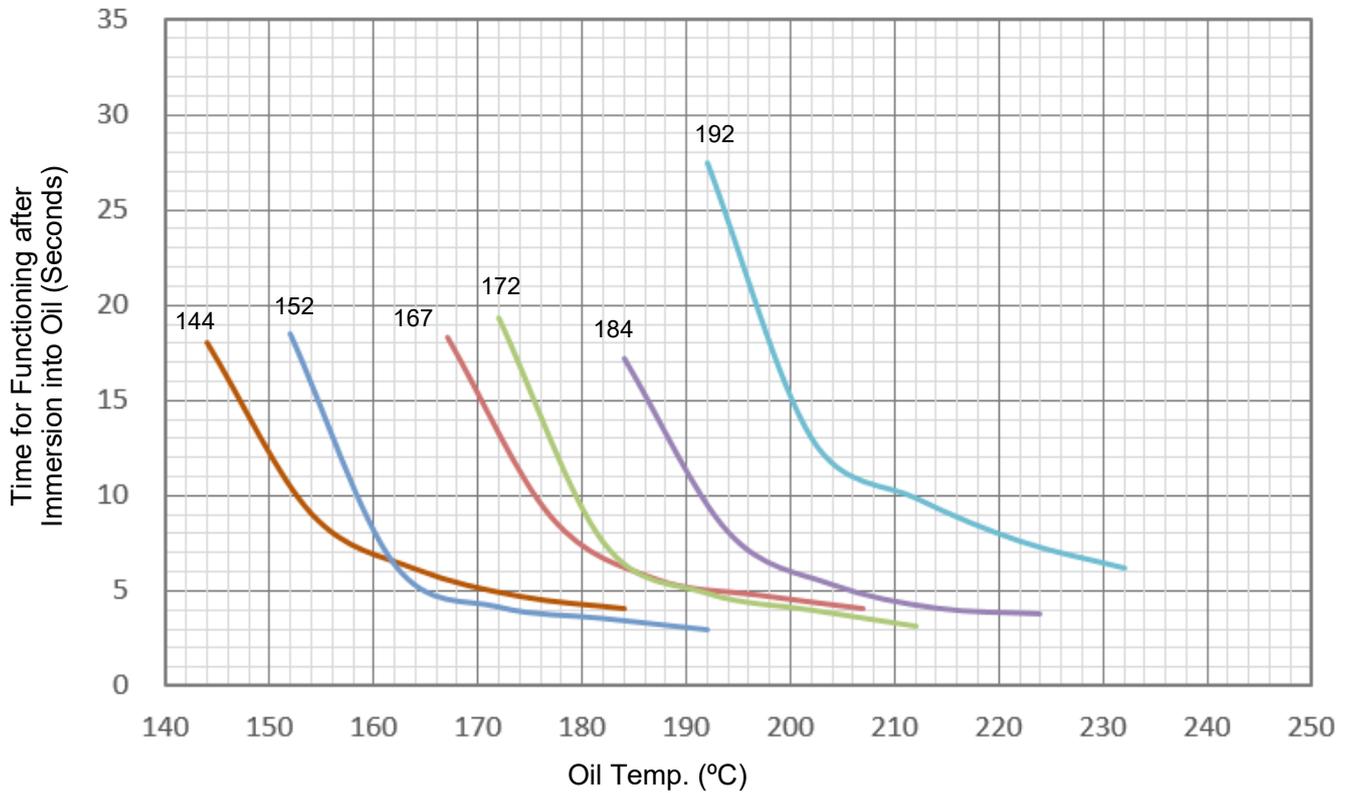


**Agency Information**

Agency Symbol	Standards	The File No. and certification No. obtained by SETsafe   SETfuse
	UL60691	E214712
	CAN-CSA-E60691	E214712
	EN60691	40052266
	J60691	JET2121-32001-2011、JET2121-32001-2012 JET2121-32001-2013、JET2121-32001-2014 JET2121-32001-2015、JET2121-32001-2016 JET2121-32001-2017、JET2121-32001-2018 JET2121-32001-2019、JET2121-32001-2020
	KC60691	SU05023-19006A、SU05023-19007A SU05023-19008A、SU05023-19009B SU05023-19010A
	GB 9816.1	2020980205000192

**Packaging Information**


**1.Bulk**

Item	PE Bag	PE Bag	Carton
Dimensions (mm)	135 x 85	220 x 190	346 x 316 x 156
Quantity (PCS)	100	1000	10000
Gross Weight (kg)			11 ± 10%

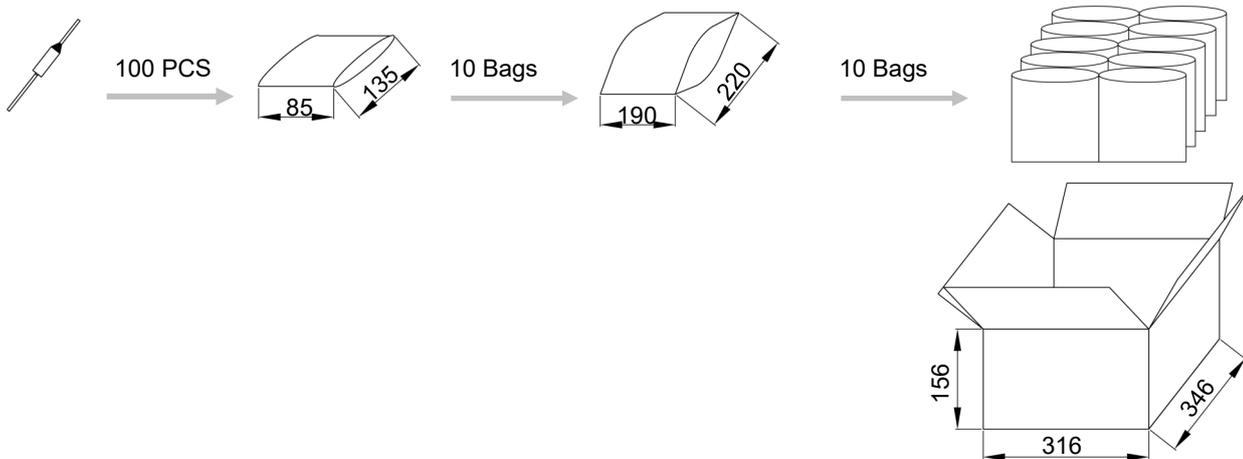


## 2.Taping

Item	Scroll	Box	Carton
Dimensions (mm)	$\Phi 250 \times \Phi 85 \times 70$	258 x 258 x 82	455 x 315 x 285
Quantity (PCS)	2000	2000	10000
Gross Weight (kg)			12.7 $\pm$ 10%

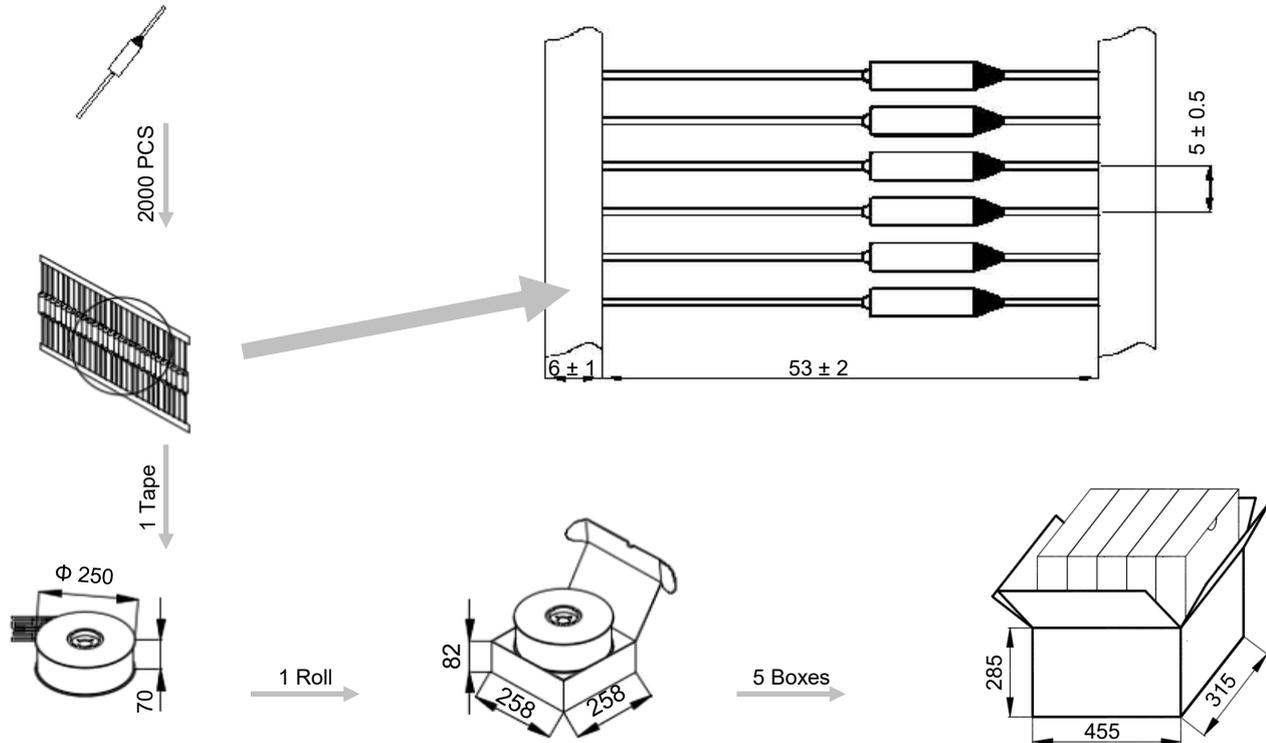

**Part Numbering System**

OTCO - RT 72 - L S A B - 001

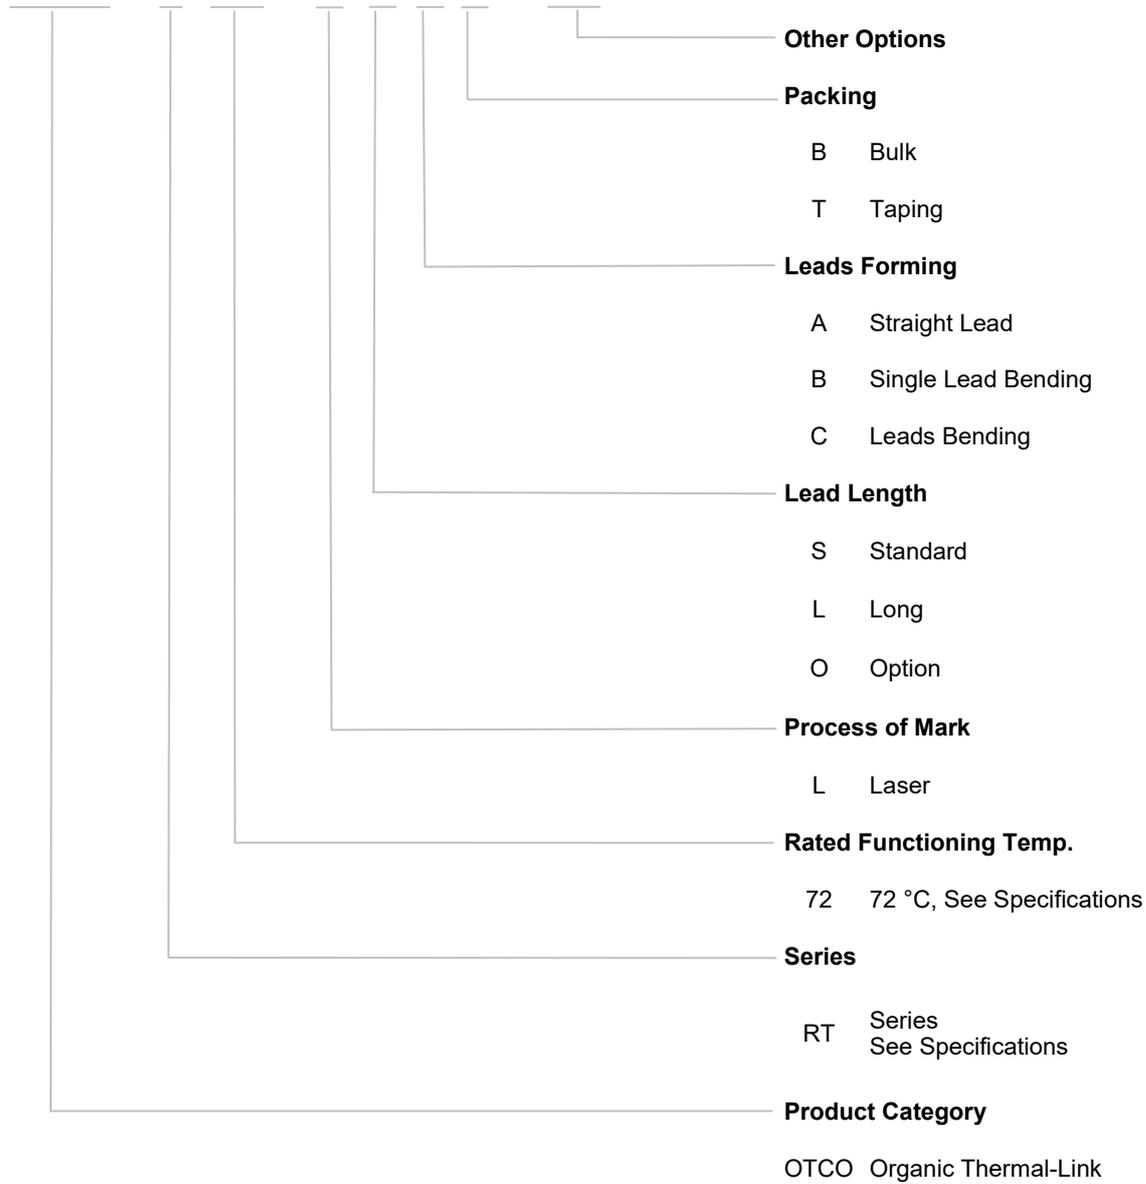

## Glossary

Item	Description
TCO	<p><b>Thermal-Link</b></p> <p>A non-resettable device incorporating a THERMAL ELEMENT which will open a circuit once only when exposed for a sufficient length of time to a temperature in excess of that for which it has been designed.</p> <p style="text-align: right;">— (GB 9816.1)</p>
OTCO	<p><b>Organic Thermal-Link</b></p> <p>Organic type Thermal-Link, organic is the THERMAL ELEMENT.</p>
$T_f$	<p><b>Rated Functioning Temp.</b></p> <p>The temperature of the Alloy Thermal-Link which causes it to change the state of conductivity with a detection current up to 10 mA as the only load.</p> <p style="text-align: right;">— (GB 9816.1)</p> <p>Tolerance: <math>T_f</math> °C (GB 9816.1, EN 60691, K60691). Tolerance: <math>T_f \pm 7</math> °C (J60691).</p>
Fusing Temp.	<p><b>Fusing Temp.</b></p> <p>The temperature of the Alloy Thermal-Link which causes it to change its state of conductivity is measured with silicone oil bath in which the temperature is increased at the rate of 0.5 °C to 1 °C / minute, with a detection current up to 10 mA as the only load.</p> <p style="text-align: right;">— (GB 9816.1)</p>
$T_h$	<p><b>Holding Temp.</b></p> <p>The Maximum temperature at which a Alloy Thermal-Link will not change its state of conductivity when conducting rated current for 168 hours.</p> <p style="text-align: right;">— (GB 9816.1)</p>
$T_m$	<p><b>Maximum Temp. Limit</b></p> <p>The temperature of the Alloy Thermal-Link stated by the manufacturer, up to which the mechanical and electrical properties of the Alloy Thermal-Link having changed its state of conductivity, will not be impaired for a given time.</p> <p style="text-align: right;">— (GB 9816.1)</p>
$I_r$	<p><b>Rated Current</b></p> <p>The current used to classify a Alloy Thermal-Link, which is the Maximum current that Alloy Thermal-Link allows to carry and is able to cut off the circuit safely.</p> <p style="text-align: right;">— (GB 9816.1)</p>
$U_r$	<p><b>Rated Voltage</b></p> <p>The voltage used to classify a Alloy Thermal-Link, which is the Maximum voltage that Alloy Thermal-Link allows to carry and is able to cut off the circuit safely.</p> <p style="text-align: right;">— (GB 9816.1)</p>
$I_n$	<p><b>Nominal Discharge Current</b></p> <p>Being able to withstand 15 peak currents of waveform 8/20 <math>\mu</math>s to test the product's durability of withstanding pulse current.</p> <p style="text-align: right;">— (UL 1449)</p>
$I_{max}$	<p><b>Max. Discharge Current</b></p> <p>Being able to withstand 1 peak current of waveform 8/20 <math>\mu</math>s to test max. pulse current that the product can withstand.</p> <p style="text-align: right;">— (UL 1449)</p>



# ATTENTION

## Usage

1. Please use OTCO without exceeding the rated current and voltage.
2. Do not use the OTCO in environments out of the standard specifications, such as those containing sulfur dioxide gas, nitrogen oxide gas, ammonia gas or formic acid. It is also not suitable for using in high humidity environment or immersed in liquid.

## Replace

OTCO is a non-repairable product. For safety aspect, it shall be replaced by an equivalent OTCO from the same manufacturer, and mounted in the same way.

## Storage

1. OTCO must be kept in a place with no sunshine or corrosive gas, the temperature shall be within 10 °C ~ 30 °C and humidity within 30 % ~ 70 %. The validity storage period of OTCO is 12 months after purchase.
2. The case and isolated lead of OTCO are silver-plated. Therefore, to avoid vulcanization, the OTCO shall not be kept around materials such as cardboard or rubber etc. which generate sulfurous acid gas.

## Lead Process

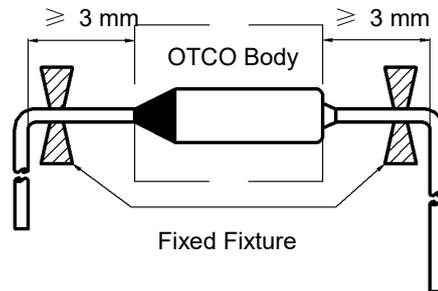


FIGURE 1

1. If lead wires has to be bent, it is important not to apply excessive pressure to the root of the lead wires. The tensile forces applied to the lead wires shall not exceed 15.7 N, and the thrust force applied to the lead wires shall not exceed 3.9 N.
2. The lead wires should be bent at a distance 3 mm or above from the body of OTCO (see Fig.1).
3. To avoid damaging the OTCO, when bending lead wires, please use pincher or similar tools to fix the OTCO.

## Installation

### Selection of Installation Location

1. Do not locate the OTCO in a place where severe vibration always occurs.
2. To reduce the deviations between the temperature design and the actual situation, it is recommended that the OTCO be install ed in close to the thermostat or temperature sensor.

### Make Sure the Temp. of Installation Location

1. The body of OTCO will generate heat as current flows through it, resulting the body temp. higher than ambient temp. The influence of temp. rise shall be considered in the design to determine the appropriate OTCO model.
2. It shall be ensured that the body temp. of OTCO and the ambient temp. at the installation position do not exceed the corresponding holding temp.  $T_h$ .
3. The end product should be tested to ensure that potential abnormal conditions do not cause ambient temp. to exceed the  $T_m$  of the OTCO.

## Mounting OTCO

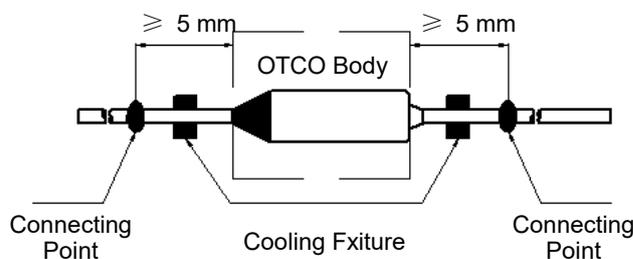


FIGURE 2

1. OTCO can be installed by soldering, welding, riveting or crimping. During and after installation, please do not pull, push or twist OTCO body or lead wires.
2. The connection point of the lead shall be no less than 5 mm away from the OTCO body (see Fig.2).
3. Try to ensure that the body of the OTCO is evenly heated. If the temp. difference is inevitable, make sure that the sealing resin side is connected close to the heat source.

**Soldering**

1. Soldering should be carried out according to below table. If secondary soldering is required, wait until the OTCO cools to room temp.
2. Soldering is not recommended for Thermal-Link with  $T_f \leq 110^\circ\text{C}$ , while non heating processes such as crimping and riveting are recommended.
3. In the process of soldering, cooling fixture should be used between soldering point and OTCO body (see Fig.2).
4. It is recommended to take X-ray after soldering, to confirm that the thermal pellet has no shrinkage after soldering.

**TABLE 1:** Max. Allowable Soldering Time for Different Length of Soldering Point from OTCO Body

Rated Functioning Temp. ( $T_f$ )	Length	Time	Length	Time	Length	Time	Max. Soldering Temp.
( $^\circ\text{C}$ )	(mm)	(s)	(mm)	(s)	(mm)	(s)	( $^\circ\text{C}$ )
$\leq 110$	5	N / A	15	N / A	25	N / A	400
111 ~ 150	5	N / A	15	1	25	2	
151 ~ 190	5	1	15	2	25	3	
$\geq 191$	5	1	15	3	25	5	


**Welding**

1. Avoid welding current flowing into the inside of the OTCO. The welding current will cause the internal parts to be welded together, resulting in the failure function of OTCO.
2. During the welding process, the lead wires of the OTCO must be supported to avoid the damage of the OTCO.
3. In the process of welding, cooling fixture should be used between welding point and OTCO body (See Fig.2).
4. It is recommended to take X-ray after welding, to confirm that the thermal pellet has no shrinkage after welding.

**Riveting or Crimping**

1. Select materials with low resistance (such as copper) for riveting and crimping.
2. Contact resistance shall be as small as possible. Large contact resistance will cause high temp. to make OTCO open in advance.
3. It is better to crimp OTCO leads to stranded lead wires rather than solid wires as the stranded wire may be crimped tighter and maintain better electrical contact during temp. cycling.
4. During the riveting and crimping process, ensure that the lead wires shall not be reversed, sealing resin shall not be destroyed.
5. When the working temp. exceeds  $150^\circ\text{C}$ , soldering reinforcement is recommended after riveting and crimping.

The isolated lead is forbidden to contact OTCO body directly to avoid short circuit (See Fig.3).

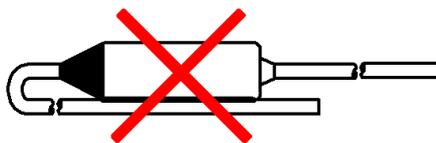

**FIGURE 3**

Thermal-Link (OTCO)-Organic Type Features & Model List Overview

Rated Functioning Temp. $T_{r(°C)}$	Model	
	RS	RT
263	RS263	RT263
257	RS257	RT257
240	RS240	RT240
229	RS229	RT229
216	RS216	RT216
192	RS192	RT192
184	RS184	RT184
172	RS172	RT172
167	RS167	RT167
152	RS152	RT152
144	RS144	RT144
134	RS134	RT134
128	RS128	RT128
121	RS121	RT121
117	RS117	RT117
110	RS110	RT110
104	RS104	RT104
99	RS99	RT99
94	RS94	RT94
84	RS84	RT84
77	RS77	RT77
72	RS72	RT72

Rated Current $I_r$ (A)	Rated Voltage $U_r$ (VAC)
10	250
15 / 16	250

Product Structure

